

pulsar n^ova[®]

Six new generation
sound level meters that
are out of this world!



 **pulsar**
Instruments Plc

Industrial, Occupational and Environmental noise measurement products.

+44 (0)1723 518011
www.pulsarinstruments.com

The Pulsar Nova Range

A range of six new generation sound level meters to suit every application & budget

- Compliant with IEC 61672-1:2013
- Intuitive design
- High performance
- Simple to use
- Designed and manufactured in the UK
- Rugged metal case
- Large anti-glare display
- High definition colour OLED display
- Greater than 30 hour battery life
- 4GB removable memory card
- Dynamic range of 20dB(A) to 140dB(A) & 143dB(C)
- Simultaneous measurement of all key parameters
- Unique calibration prompt
- Standard and advanced data viewing modes
- Optional features to cover every requirement & budget



nova

+44 (0)1723 518011
www.pulsarinstruments.com

Overview

The Nova range of high performance sound level meters successfully combines advanced technology noise measurement methods with ease of use and durability.

We have listened to our customers for 45 years. We know that you all have different requirements and what you need today may change in the future. We also understand that purchasing noise measurement equipment is a huge investment.

The Nova range consists of six powerful sound level meters. These differ from other sound level meters, as they offer the user the unique opportunity to add features either immediately or at a later date so that the instrument will always be suitable for their requirements.

Standard Measurement Kits

Instruments are usually supplied as part of a noise measurement kit which contains everything required to take noise measurements.


The Nova kit contains:

Nova sound level meter, acoustic calibrator, windshield, batteries, hard kit case, 7 year warranty, calibration certificates, the Pulsar AnalyzerPlus software and download cable.

Both Class 1 and Class 2 instruments have a removable preamplifier which enables the instruments to be used with microphone extension cables

Software

AnalyzerPlus allows the user to download their measurement data onto a PC or laptop for analysis and to create a variety of reports.

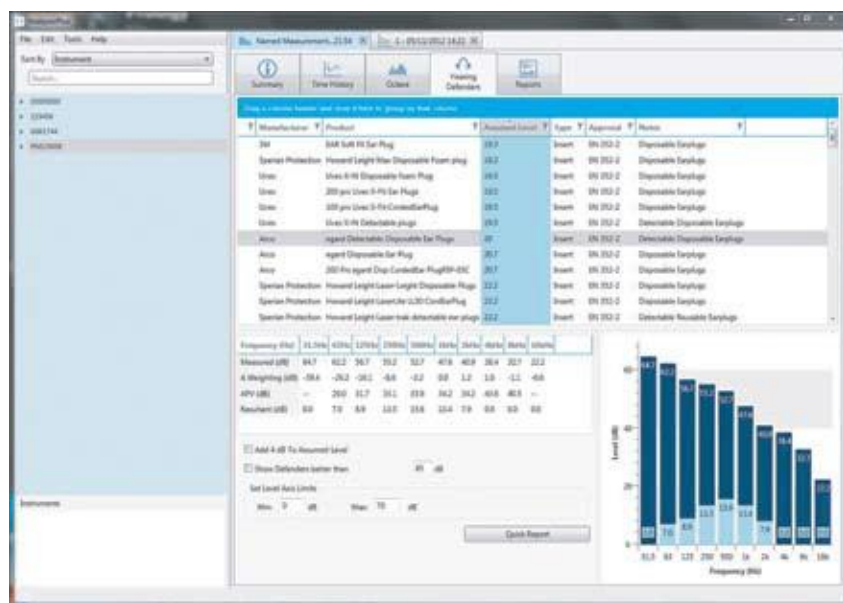

Example of a generated report with the Nova software AnalyzerPlus of the hearing defenders' tab for PPE equipment specification using octave band measurements which includes a large database of hearing protection equipment and reporting functions. NB. The Pulsar Nova 'AnalyzerPlus' software package is supplied with all instruments and is used to configure your sound level meter. For customers with the data logging option, Pulsar's outstanding Nova AnalyzerPlus software allows the user to download their measurement data onto a PC or laptop for analysis and to create a variety of reports.

Model 41 (Class 1) & Model 42 (Class 2)

Entry level sound level meter



- IEC 61672-1:2013 compliant sound level meters
- Low cost Class 1 or Class 2 SPL instruments
- OLED display can be seen in all conditions
- Calibration prompt for compliant, accurate measurements
- Simultaneous measurement of all key noise parameters
- Add features now or later so that your meter always suits your budget and needs
- 20dB(A) to 140dB(A) dynamic measurement range

Applications

- Basic noise level assessments
- Emergency service alarm testing
- Sound system installation
- Vehicle noise measurement

Optional features table

	Class 1	Class 2	SPL	Simultaneous A, C & Z Frequency Weightings	Simultaneous F S & I Time Weightings	Leq/Peak (inc C-A & Quick Integrator Settings)	Pause & Back Erase	Data Logging	Manual/Audio Record & Data Logging	Audio Note & Data Logging	Repeat Timer & Data Logging	Single Timer	TWA/dose	Ln Values	1:1 Octaves
Model 41	ti		ti	ti	ti	0	0	0	0	0	0	0	0	0	0
Model 42		ti	ti	ti	ti	0	0	0	0	0	0	0	0	0	0

ti Standard feature 0 Optional add on feature

Model 43 (Class 1) & Model 44 (Class 2)

The professional's sound level meter



- A simple to use occupational sound level meter
- All of the features of the Model 41 & Model 42 with the addition of:
- Leq, Peak and C-A for the HML method of hearing protection calculation
- Pause & back erase function
- 20dB(A) to 140dB(A) & 143dB(C) dynamic measurement range
- Colour coding for measurement status

Applications

- Noise at work
- Occupational & industrial hygiene
- Construction noise measurement
- Machinery noise testing
- Entertainment noise measurement



Optional features table

	Class 1	Class 2	SPL	Simultaneous A, C & Z Frequency Weightings	Simultaneous F S & I Time Weightings	Leq/Peak (inc C-A & Quick Integrator Settings)	Pause & Back Erase	Data Logging	Manual Audio Record & Data Logging	Audio Note & Data Logging	Repeat Timer & Data Logging	Single Timer	TWA/dose	Ln Values	1:1 Octaves
Model 43	ti		ti	ti	ti	ti	ti	0	0	0	0	0	0	0	0
Model 44		ti	ti	ti	ti	ti	ti	0	0	0	0	0	0	0	0

ti Standard feature 0 Optional add on feature

Model 45 (Class 1) & Model 46 (Class 2)

The premium sound level meter

All of the features of the Model 43 & Model 44 with every feature below as standard:

- AnalyzerPlus data-logging software
- Manual audio record
- Audio Note
- Repeat Timer
- Single Timer
- TWA/dose
- Ln Values
- Real time 1:1 octave band filters

Applications

- Noise at work
- Occupational & industrial hygiene
- Environmental noise measurement
- Boundary noise measurement
- Machinery noise testing
- Vehicle noise testing
- Entertainment noise measurement



Features table

	Class 1 (PTB approved)	Class 2	SPL	Simultaneous A, C & Z Frequency Weightings	Simultaneous F S & I Time Weightings	Leq/Peak (inc C-A & Quick Integrator Settings)	Pause & Back Erase	Data Logging	Manual Audio Record & Data Logging	Audio Note & Data Logging	Repeat Timer & Data Logging	Single Timer	TWA/dose	Ln Values	1:1 Octaves
Model 45	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature
Model 46	Optional add on feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature	Standard feature

Standard feature Optional add on feature

General

Accuracy

Class 1 – Model 41, Model 43, Model 45
Class 2 – Model 42, Model 44, Model 46

Applicable Standards

IEC 61672-1:2013 Class 1 or Class 2, Group X
IEC 60651:2001 Type 1 I or Type 2 I
IEC 60804:2000 Type 1 or Type 2
IEC 61252:1993 Personal Sound Exposure Meters
ANSI S1.4 -1983 (R2006), ANSI S1.43 - 1997 (R2007)
ANSI S1.25:1991
1:1 Octave Band Filters to IEC 61260 & ANSI S1.11-2004

Microphone

Class 1 PM1 pre-polarized
Class 2 PM2 pre-polarized
Microphone Preamplifier
PA40 Removable Preamplifier
Measurement Range
20dB -140dB RMS Single Range (143dB peak)
Noise Floor
<18dB(A) Class 1, <21dB(A) Class 2
Time Weightings
'F' (Fast), 'S' (Slow) & 'I' (Impulse) all measured simultaneously
Frequency Weightings
RMS & Peak: A, C, & Z (un-weighted) all measured simultaneously
Frequency Bands
10 1:1 Octave Bands: 31.5Hz to 16kHz

Integrators

Three
simultaneously measuring "virtual" noise meters.
Integrator 1 is preset to Q3 for Leq functions.
Integrators 2 & 3 can be configured with the following:
Exchange Rate: 3, 4 or 5dB
Threshold: 70dB to 120dB (1dB steps)
Time Weighting: None or Slow
Criterion Level: 70dB to 120dB (1dB steps)
Criterion Time: 1 to 12 hours in 1 hour steps
Integrator Quick settings (pre-set)
EU, OSHA HC & OSHA NC, OSHA HC & ACGIH, MSHA HC & MSHA EC, Custom 1 & Custom 2

Ln

Statistical Values
14 independent statistical Ln values calculated from 1/16th LAF
7 are preset to L1.0, L5.0, L10.0, L50.0, L90.0, L95.0 & L99.0
7 user defined Ln values
Time History Data Rates (Global settings) 10ms, 62.5ms, 125ms, 250ms, 1/2 sec, 1 sec, 2 sec (user selectable)
Language options
English, French, German, Italian, Spanish as standard
NB. Other language options will be available.

Physical

Batteries

6 x AA
Battery life
Typically 30 hours with Alkaline AA
Typically 50 hours with Lithium AA
Rechargeable battery life is dependent upon the battery type and screen brightness

External power

5v-15v via Multipin I/O socket

Weight

440g without batteries

Size

280mm
x 80mm x 42mm with preamp and microphone

Connections

USB 2.0 Mini-B to PC
AC output via 3.5mm Stereo jack
AC & DC output via Multipin I/O socket

Tripod Mount

1/4" Whitworth socket

Case

Die cast aluminium with silicon elastomer

keypad and soft touch back

Display

High resolution anti-glare OLED display
Ambient light sensor
Illuminated keypad

Supplied

Windshield, Wrist Strap, USB Download Cable, AnalyzerPlus software, AA Batteries

Accessories

Conformance, Logging & Storage

Conformance

Environmental
Operating Temperature: -10°C to +50°C
Storage Temperature: -20°C to +60°C
Humidity: Up to 95% RH Non-Condensing
Electromagnetic performance
IEC 61672-1:2013 & IEC 61672-2:2013

Except where modified by EN 61000-6-1:2007 & EN 61000-6-1:2007

Logging and Storage

Memory
4GB removable memory card
Audio Note Recording
A spoken note (up to 30 seconds) attached to measurements

Audio Recording

Manual recording
Quality – 48kHz/32bit WAV format

Measurement Control

The unit can be set to record and store data over fixed times of:
1 min, 5 min, 10 min, 15 min, 30 mins, 1 hour, Lden (Day, Evening, Night)

Automatic Synchronisation & Repeat options
Pause
Back Erase with user selectable duration (via AnalyzerPlus software)

Model Specific Measurement Parameters

Standard Measurement Parameters Model 41 & Model 42:

Lxy, Lxy Max, Lxy Min
Time, date & duration of measurement
Extra measurement and stored functions available.

Standard Measurement Parameters Model 43 & Model 44:

Lxy, Lxy Max, Lxy Min
Lxeq, LCPeak, LZPeak, LAPeak LCEq-LAeq, LxE, LAleq
Graph of Short LAeq, LCPeak

Time, date & duration of measurement
Extra measurement and stored functions available.

Standard Measurement Parameters Model 45 & Model 46:

Lxy, Lxy Max, LxyMin
Lxeq, LCPeak, LZPeak, LAPeak LCEq-LAeq, LxE, LAeqT
Graph of Short LAeq, LCPeak
Measurement Run Time
Integrators 2 & 3: TWA, Dose %, Est Dose %
Real-Time 1:1 Octave Bands (Graphical & Numeric)

14 Statistical Values (Ln)

Stored Parameters - Model 45 & Model 46

LxyMax & Time History of LxyMax
LAeq, LCEq, LZeq, LCPeak, LZPeak, LAPeak, LAleq
Time History of LAeq, LCEq, LZeq, LCPeak, LZPeak, LAPeak, LAleq
Integrators 2 & 3: LAVG, TWA, % Dose
Time History of LAVG
1:1 Octave Bands: Overall Leq & Leq Time History for each band

Ln Values: 14 independent statistical values
Audio recording during measurement
Time, date & duration of measurement

Where x means the three frequency weightings A, C and Z and y means the three time weightings 'S' (Slow), 'F' (Fast) and 'I' (Impulse). All weightings simultaneously measured where appropriate.
Other functions may be calculated by the AnalyzerPlus software.

Useful Information

Input & Output Cables

PSR101 - Nova 1m Mini-B to Type A USB Cable
PSR171 - Nova power input cable, 2.1mm Power Jack, 2m
PSR174 - Nova AC & DC Output, 18 way to 2 x Phono, 1m
PSR176 - Nova 12v Battery pack cable 2m to tinned ends with inline fuse
PSR177 - Nova AC output cable, 3.5mm Mono to 3.5mm Stereo Jack, 2m
PSR185 - Nova AC output cable, 18 way to Phono, 1m
PSR190 - Nova power input cable, 2.1mm Power Jack & mains power supply

Software AnalyzerPlus
Download, Configuration & Analysis software supplied as standard.
Compatible with Microsoft Windows XP, Vista, 7 (32bit & 64bit) & 8 (32bit & 64bit)

Ordering Codes
Sound Level Meter and Measurement Kit
Model 41: PSR-41
Model 41 Kit: PSR-41K

Model 42: PSR-42
Model 42 Kit: PSR-42K
Model 43: PSR-43
Model 43 Kit: PSR-43K
Model 44: PSR-44
Model 44 Kit: PSR-44K
Model 45: PSR-45
Model 45 Kit: PSR-45K
Model 46: PSR-46
Model 46 Kit: PSR-46K

Measurement Kits
Instruments can be supplied as a complete measurement kit to ensure that you have all the accessories necessary to perform your noise survey.

The Nova noise measurement kit contains:
Sound Level Meter, Acoustic Calibrator, Windshield, Kit case, Wrist Strap, AnalyzerPlus Software, USB Download Cable, Batteries, Operating Manuals, Calibration Certificates & 7 year Warranty.

Options Ordering Codes - Model 41 & Model 42
PSR0110 - Data Logging

PSR0111 - Manual audio record & Data Logging
PSR0112 - Audio Note & Data Logging
PSR0113 - Repeat Timer & Data Logging
PSR012 - Single Timer
PSR013 - Leq/Peak & C-A
PSR014 - Pause / Back erase
PSR015 - TWA/ dose
PSR016 - Ln Values
PSR017 - Real Time 1:1 octave band filters

Options Ordering Codes - Model 43 & Model 44
PSR0110 - Data Logging
PSR0111 - Manual audio record & Data Logging
PSR0112 - Audio Note & Data Logging
PSR0113 - Repeat Timer & Data Logging
PSR012 - Single Timer
PSR015 - TWA/dose
PSR016 - Ln Values
PSR017 - Real Time 1:1 octave band filters
Notes: All specifications, features and values are subject to change.

Distributed in Australia by:



Expert Testing Services (ETS)

Ph: 02 9730 2019

sales@experttesting.com.au

www.experttesting.com.au



www.pulsarinstruments.com

